

HIPE MAYS MACHINERY RENTALS



Common Features



Compact & easily towable

A collapsible cage means the Athena packs down to a small size making overhead transitioning easy. With a maximum weight of 1990 kg, it is easily towed by most work vehicles.



Dual power source

Use tools wherever you need to with a 220V electric pump for indoors and an onboard power source in the basket for when power isn't available. Also available in a lithium ion variation.




Extendable and collapsible basket

The extendable and collapsible basket is quick and easy to adjust for extreme access situations. Raise or lower the cage walls within five minutes to keep you on the move.


	Athena HE	Athena 850
Basket capacity	250 kg (2 op.)	250 kg (2 op.)
Max working height	7.8 m	7.9 m
Max height basket floor	5.8 m	5.9 m
Moving height	4.0 m	6.1 m
Lateral levelling for moving at heights	-	+ / - 4°
Powered (option)	-	Petrol Honda iGX390
Powered Standard	Petrol Honda iGX390	Diesel Hatz 1B40
Powered (option) Bi energy	-	Lithium ion with Hatz 1B40 Diesel
Accelerator	Automatic	Automatic
Undercarriage	Retractable	Bi-Levelling
Basket levelling	Automatic	Automatic
Longitudinal levelling front	+/- 13°	+/- 16°
Longitudinal levelling rear	Rear +/- 14°	+/- 20°
Lateral levelling	+/- 23°	+/- 15°
Power generator (option)	220V-1kW (iGX390, 1B40)	220V-1kW
Electric motor	220V-2kW	220V-2kW
Hydraulic commands	Proportionals	Proportionals
Direction-control system	Yes	Yes
Easy-drive system	No	Yes
Kit for high speed	Max 2.20 km/h	Max 2.20 km/h
Ground emergency	Yes	Yes
Control of inclination	Automatic	Automatic
Gradeability	25°	25°
Side slope	21°	21°
Length	2.14 m	1.94 m
Width	0.80 ÷ 1.24 m	1.30 ÷ 1.50 m
Minimum machine height with folded railings	1.88 m	1.98 m
Total weight	1781 kg	1990 kg
Compliance	EN 280, ANSI, CSA, ASNZS1418	EN 280, ANSI, CSA, ASNZS1418



ATHENA HE DIMENSIONS

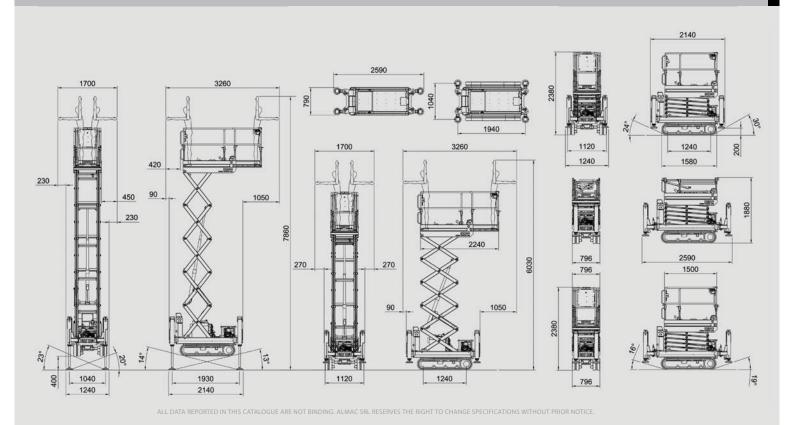

ATHENA 850 DIMENSIONS

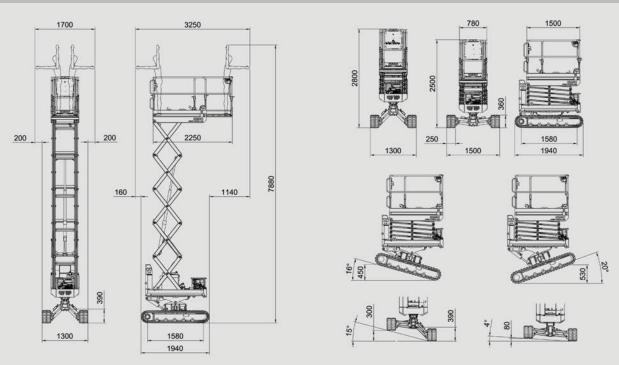

ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.

