Dynapac CA6000PD

Single drum soil compactors





Technical data

Masses	
Operating mass (incl. Cab)	19,300 kg
Module mass (front/rear)	12,650/6,650 kg
Max. operating mass	19,500 kg

Dimensions	
Drum width	2,130 mm

Traction	
Speed range (Dual/TC/AS)	4/6/7/11 km/h
Vertical oscillation	±9 °
Tyre size (12 ply)	23,1 x 26 TR
Theor. gradeability	56 %
Number of pads	130
Pad height	102 mm
Pad area	146 cm ²

****	Compaction	
	Nominal amplitude (high/low)	2.1/0.8 mm
	Vibration frequency (high/low amplitude)	29/30 Hz
	Centrifugal force (high/low amplitude)	360/150 kN

Engine	
Manufacturer/Model	Deutz TCD6,1L6 (IIIB/4i)
Rated power, ISO 14396	150 kW (204 hp) @ 2,200 rpm
Fuel tank capacity	272

Engine	
Manufacturer/Model	Deutz TCD2012L06 (IIIA/3)
Туре	Water cooled turbo diesel
Rated power, ISO 14396	150 kW (204 hp) @ 2,200 rpm


Г	ydraulic system	
D	riving	Hydrostatic
V	ibration	Hydrostatic
S	teering	Hydrostatic
S	ervice brake	Hydrostatic in forward and reverse lever.
	arking/Emergency rake	Failsafe multidisc brake in drum gear box and in rear axle.


Dynapac CA6000PD

Single drum soil compactors



Technical data

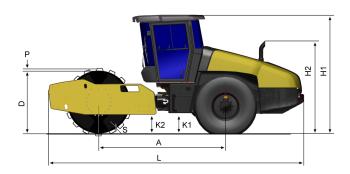

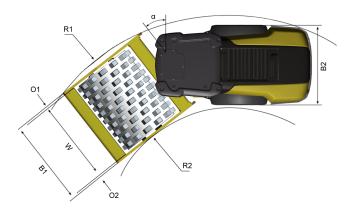

Dimensions	
A. Wheelbase	3,100 mm
B1. Width, front	2,340 mm
B2. Width, rear	2,130 mm
D. Drum diameter	1,518 mm
H1. Height, with ROPS/cab	2,890 mm
H2. Height, w/o ROPS/cab	2,130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	6,240 mm
O1. Overhang, right	105 mm
O2. Overhang, left	105 mm
P. Pad height	102 mm
R1. Turning radius, outside	5,800 mm
R2. Turning radius, inside	3,300 mm
S. Drum shell thickness	34 mm
W. Drum width	2,130 mm
α. Steering angle	±38°