


XE-CT SERIES

The XE-CT series of crawler type scissor lift adopts rubber tracked chassis; the imitation tank structure design; allows aerial work platform to work on the soft ground, breaking the limitation that the aerial work platform must be constructed on the hard ground. The seamless track of the Mantall XE-CT series lift will not cause damage to the ground or leave traces when turning at 0 degrees. The rubber crawler walking system has characteristic of low noise, low vibration and comfortable ride, especially suitable for high-speed transfer occasions, achieving full-surface passing performance.

Model	XE60CT	XE80CT
Working height max(m) H1	6.8	8.0
Platform height max(m) H2	4.8	6.0
Lifting capacity(kg)	230	230
Weight(kg) KG	1140	1205
Platform sizem B*C*A	1.84*0.9*1.1	1.84*0.9*1.1
Skirting board height(m)	0.15	0.15
Stowed length and width(m) E*F	2.15*1.0	2.15*1.0
Stowed height(m)D	1.75	2.1
Hydraulic tank capacity L	7.0	7.0
Ground clearance(m)	0.13	0.13
Vertical tilt°	2°	2°
Lateral tilt°	3°	3°
Load number max	2	2
Raised/Loweringtime(s)	32/28	32/28
Power source	24V/225Ah	24V/225Ah
Crawler size	200*72 AB-A1	200*72 AB-A1
Gradeability	40%	40%

XE-CT Working Range

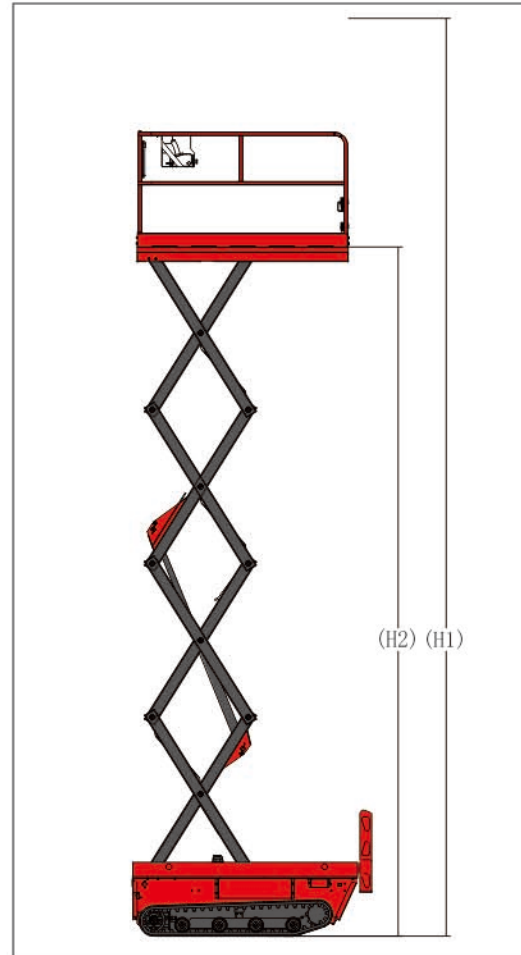

Function Description

Mantall crawler-type electric scissor lift has characteristics of zero emission, no noise, and has powerful climbing function.

The carrying capacity could be up to 230Kg, and lifting process is stable, safe and reliable.

Strong driving force and fast traction speed.

With on-board diagnostic system, intelligent fault alarm system and other functions.

XE-CT Collecting Chart

